



Locking and Unlocking Instructions

Model "E" B-Vent, Pellet Vent, & Gas Vent Connectors sizes 3-6 inch

TO LOCK NEW CONNECTION STYLE

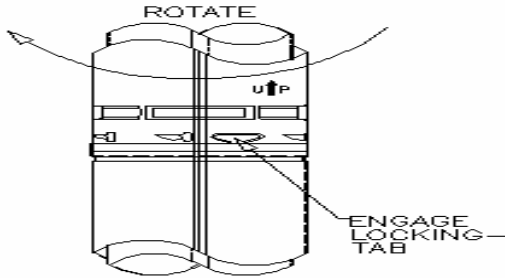


1.) Press together and engage the locking tab. Once locking tab is engaged rotate pipe until the "SEAM" of each pipe sections are offset approximately 1" from each other.

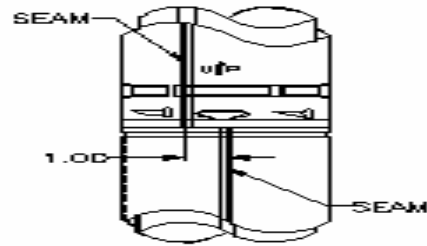


2.) Pipes are now firmly connected.

TO UNLOCK NEW CONNECTION STYLE

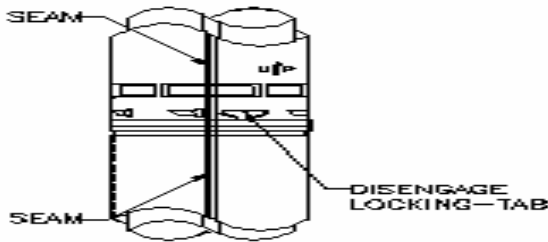


1.) Rotate pipe until seams are aligned. Disengage locking tab.




2.) Pull pipe sections apart.


NEW/OLD CONNECTION COMPATIBILITY



Line up pipe ends and snap together. Push tab must be engaged for secure connection.

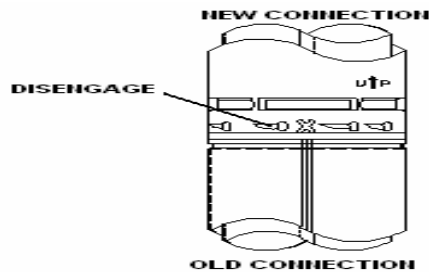

To disconnect new female end from old male end, disengage lance to left of embossed "X" and the push tab. Line up seams and pull apart.

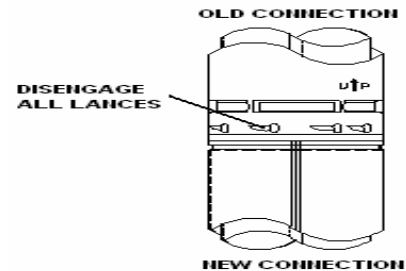

To disconnect new male end from old female end, disengage all lances and the push tab. Line up seams and pull apart.